

AMPHENOL TCS

TB-2345

Lynx QD

DFM and SMT Assembly Guideline

Revision “B”

Specification Revision Status

Revision	SCR No.	Description	Initial	Date
“A”	S7477	Initial Release	JP	3-12-19
“B”	S7903	Add more current images, revise the part # scheme.	JP	9-26-19

Amphenol TCS

A Division of Amphenol Corporation

Amphenol TCS
200 Innovative Way, Suite 201
Nashua, NH 03062
603.879.3000

www.amphenol-icc.com

Aptera, Chameleon, Crossbow, eHSD, GbX, HD Plus, HDM Plus, HDM, HD-Optyx, InfinX, Lynx, NeXLev, Paladin, Ventura, VHDM, VHDM-HSD, and XCede, are trademarks or registered trademarks of Amphenol Corporation. AirMax VS is a registered trademark of FCI. Information contained in this document is summary in nature and subject to change without notice. Appearance of the final, delivered product may vary from the photographs shown herein.

Table of Contents

- 1.1 DFM Guideline Introduction**
 - 1.2 Scope**
 - 1.3 Purpose**
 - 1.4 Reference Documents**
 - 1.5 Levels of Requirement**

- 2.1 Design Introduction – Lynx QD**
 - 2.1.1 Part Numbering Matrix (Plug)**
 - 2.1.2 Part Numbering Matrix (Receptacle)**

- 2.2 Design Introduction – Lynx QD**
 - 2.1.3 Part Numbering Matrix (Plug and Receptacle)**

- 3.1 Design Requirements**
 - 3.2 Lynx QD Solder Joint Definition – Reliability Factors**
 - 3.3 Landing Pad Footprint**
 - 3.4 PCB General Requirements**
 - 3.5 Preferred Mating/Un-Mating and Allowable Mate Angles**
 - 3.6 Lynx QD Mating and Polarizing Features**
 - 3.7 Mechanical Requirements**
 - 3.8 Keep-out Zone and Clearances**

- 4.0 Connector Handling**

- 5.0 Solder Paste Process**

- 6.1 Placement Process**
 - 6.2 Placement Process - Feeders**
 - 6.3 Reflow Process - Reflow Profile Recommendations**
 - 6.4 Reflow Process - Vacuum Cap Removal**

- 7.0 Double Sided Reflow Process**

- 8.1 Rework Process**

Addendums:

- A. DFM Check Sheet - used for design reviews, and process start-up.**

1.1 DFM Guideline Introduction

This document is intended to provide design criteria and process information that will promote automation, cost and cycle time reduction, and help to produce designs that will yield high quality for the solder attach of Lynx QD connectors. The connector will be used in many assembly processes, and because all processes are different, this document provides a starting point, or "baseline" criteria for application process development. **This document is not intended to be the final process definition, nor is it intended to constrain designs.** If customers cannot meet/follow all of the recommendations, they should contact Amphenol TCS to discuss the best alternatives.

1.2 Scope

This document has been prepared to communicate the application guidelines for the Lynx QD Surface Mount Connector. It provides Printed Circuit Board (PCB) footprint and layout criteria, and "starting-point" process recommendations for SMT assembly. Updates and revisions will be issued on a continuous basis to expand the guidelines, address changes in technology and manufacturing capabilities, and cover modifications and/or additions to current criteria.

1.3 Purpose

DFM is the sharing of manufacturing guidelines developed from industry standards and the knowledge gained from design and production. Applying these guidelines concurrently, in new product development with the design and application of Amphenol's Lynx QD connector, can positively impact cost, time to market, and quality of the end product.

1.4 Reference Documents

Located at: <http://www.amphenol-tcs.com/lynxqd>

- 1.4.1 General Product Spec
- 1.4.2 Plug Assembly Drawing
- 1.4.3 Receptacle Assembly Drawing
- 1.4.4 Lynx QD Data Sheet

1.5 Levels of Requirement

For each requirement, an impact and benefit statement is included to quantify the requirement. Some requirements are stated as being recommended or preferred per the following:

- Recommended:** The minimum processing requirement – a deviation **will** most likely impact manufacturability and cost.
- Preferred:** Should be done when possible – a deviation **could** impact manufacturability and cost.


2.1 Design Introduction – Lynx QD Connector

The Lynx QD is organized as a four-row connector which accommodates 20 to 80 positions up to 320 pins. The QD configuration offers a keying feature to prevent incorrect mating orientation and offset PCB posts which prevent incorrect installation on the board. The connector is completely SMT attach, utilizing a gull wing lead for termination to the board, and is readily applied using standard SMT processes.


The QD connector is also available in multiple form factors – Coplanar, Right Angle and as a Vertical Stacker.

LYNX QD : RA 20POS REGULAR

MATED VIEW

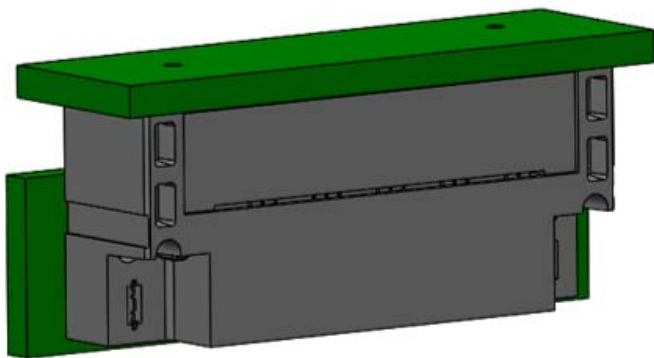


UNMATED VIEW

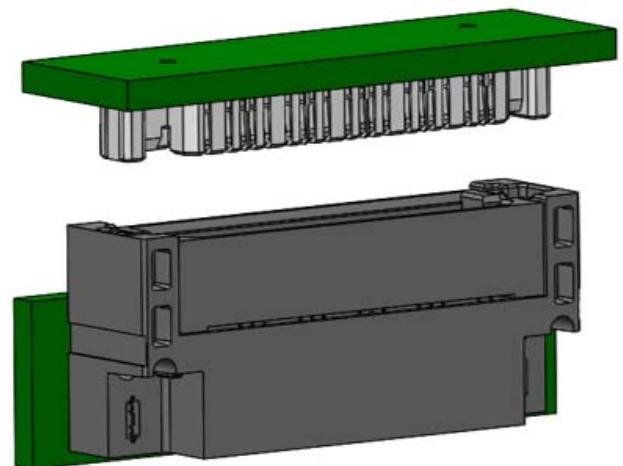


LYNX QD : CO-PLANAR 20POS REGULAR

MATED VIEW

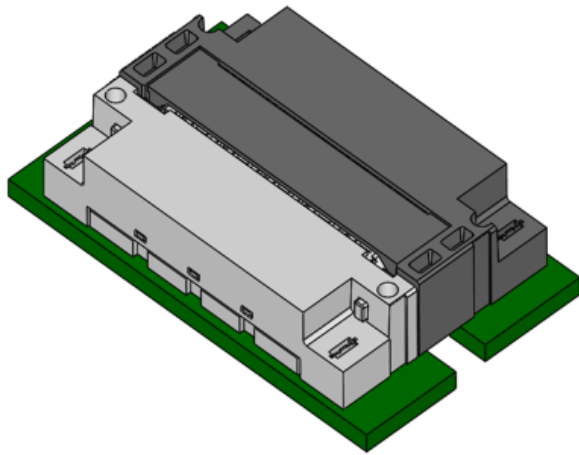


UNMATED VIEW

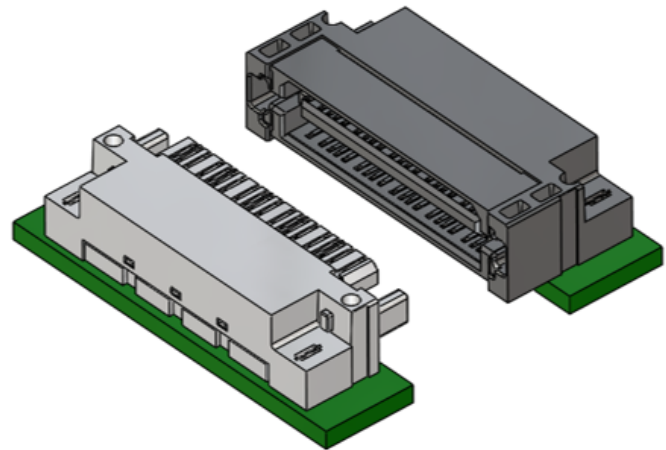


LYNX QD : STACKER 20POS REGULAR

MATED VIEW

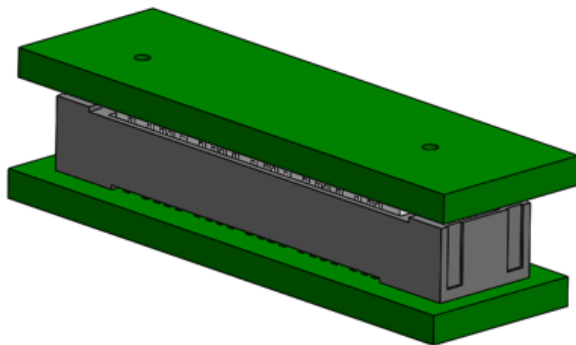


UNMATED VIEW

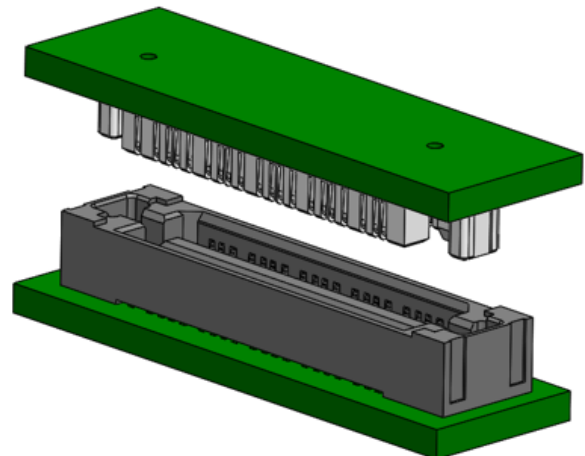


2.1.1 Part Numbering Matrix: Lynx QD – Plug and Receptacle

Plug Assembly – Right Angle

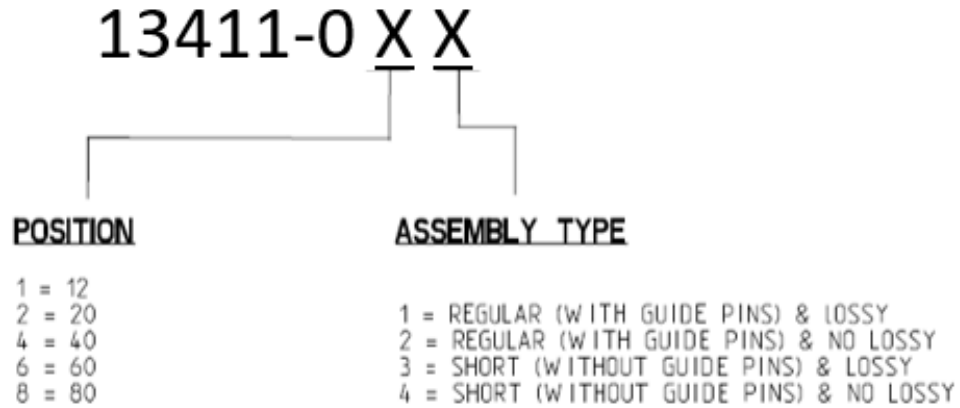

Receptacle Assembly – Right Angle

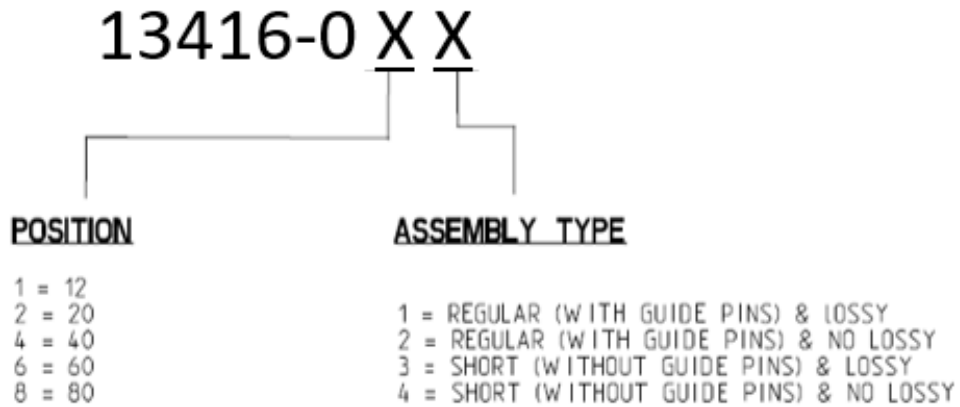

Plug Assembly - Stacker

13423- X X X

STACKED HEIGHT

- A = 4MM
- B = 5MM
- C = 6MM
- D = 7MM
- E = 8MM
- F = 9MM
- G = 10MM
- H = 11MM
- I = 12MM
- J = 13MM
- K = 14MM
- L = 15MM

POSITION

- 2 = 20
- 4 = 40
- 6 = 60
- 8 = 80

ASSEMBLY TYPE

- 1 = REGULAR (WITH GUIDE PINS) & LOSSY
- 2 = REGULAR (WITH GUIDE PINS) & NO LOSSY
- 3 = SHORT (WITHOUT GUIDE PINS) & LOSSY
- 4 = SHORT (WITHOUT GUIDE PINS) & NO LOSSY

Receptacle Assembly - Stacker

13427-0 X X

POSITION

- 1 = 12
- 2 = 20
- 4 = 40
- 6 = 60
- 8 = 80

ASSEMBLY TYPE


- 1 = REGULAR (WITH GUIDE PINS) & LOSSY
- 2 = REGULAR (WITH GUIDE PINS) & NO LOSSY
- 3 = SHORT (WITHOUT GUIDE PINS) & LOSSY
- 4 = SHORT (WITHOUT GUIDE PINS) & NO LOSSY

3.1 Design Requirements

3.2 Lynx QD Solder Joint Definition – Reliability Factors

The recommendations made below have a direct impact on the reliability of the connector solder joint, and play an important role in facilitating the connectors' ability to self-center and achieve the best possible location tolerances.

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Recommend using a "Copper Defined" landing pad as opposed to a "Solder-Mask Defined" pad. 	<ul style="list-style-type: none"> "Copper defined" better insures a robust, accurately located pad – critical to part location tolerance. "Copper defined" pad produces a more reliable solder joint – allowing solder to wrap around the pad edge.
<ul style="list-style-type: none"> Pad Size = 0.740mm x 0.370mm 	<ul style="list-style-type: none"> Smaller pad will result in decreased wetting area, based on solder volume – increasing the risk of solder fracture. Larger pads will increase the risk of shorting.
<ul style="list-style-type: none"> Solder mask should be clear around pad 	<ul style="list-style-type: none"> In-accurate registration will result in soldermask encroaching onto copper pad.

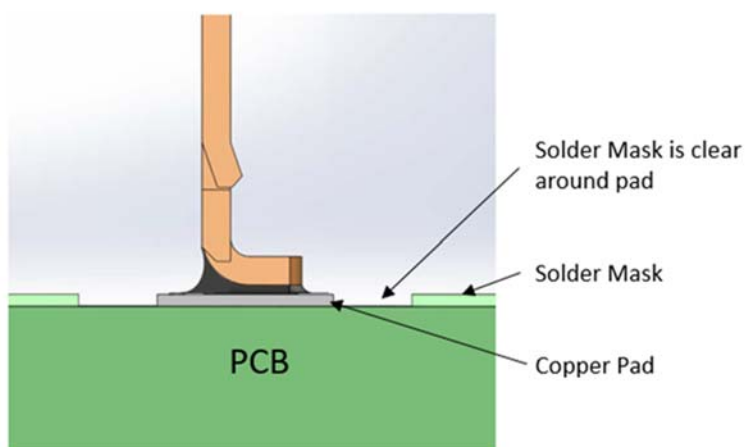

Copper defined pad yields highest quality solderjoint compared to solder mask defined

- Does not inhibit connector ability to self center
- Solder creates proper meniscus to promote maximum strength and proper wetting

3.3 Landing Pad Footprint

Refer to Figure 3.2.1 for overall landing pad layout. Via in pad or offset will be application dependant. The exact design will depend on several factors including design goals, route-ability, customer specific design for manufacturability (DFM) guidelines, and PCB fabricator capabilities. The diagram below offers a starting point, with the critical parameters in bold.

Requirements	DFM Impact/Benefit/Alternatives
<ul style="list-style-type: none"> Amphenol TCS recommends a 0.740mm x 0.370mm "Copper Defined" landing pad over a "Solder-Mask Defined" pad. 	<ul style="list-style-type: none"> See previous section for impact
<ul style="list-style-type: none"> Minimum .13mm (.005") Solder Mask Dam between pad and via. 	<ul style="list-style-type: none"> Prevents solder from wicking away from pad and into via, causing insufficient solder joints.
<ul style="list-style-type: none"> It's preferred to mask the vias if design allows, or if a .13mm min dam can't be held. 	<ul style="list-style-type: none"> Via drill sizes can be changed based on PCB fabricators board thickness aspect ratio, but must insure a minimum solder mask dam.

Landing Pad Details
(Plug Shown)

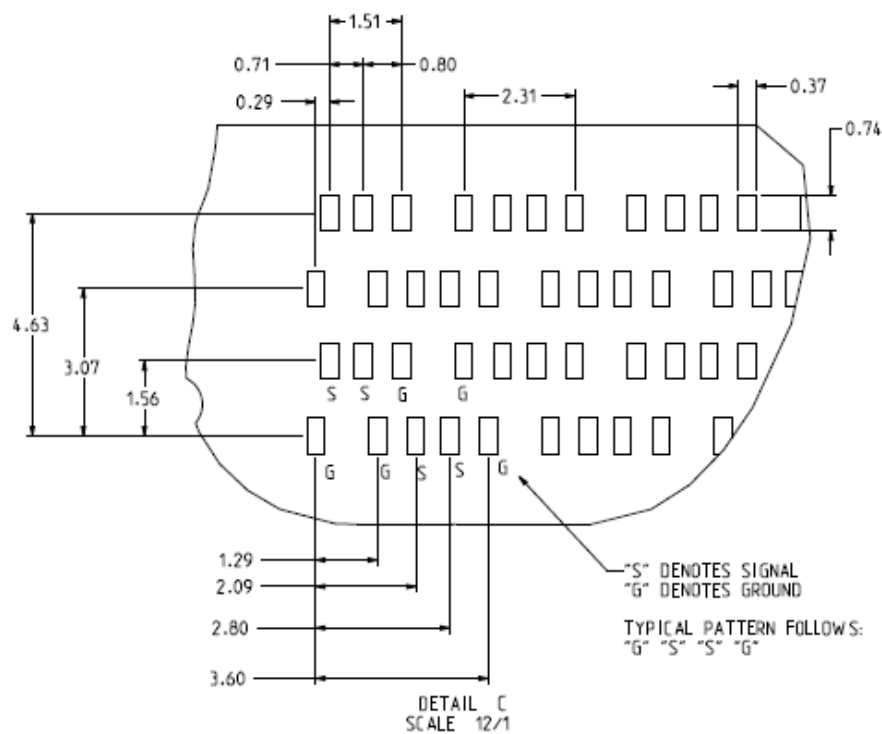



Figure 3.3.2 Lynx QD Detailed Board Layout (General Requirements, Refer to Customer Drawing for specific dimensions)

PCB Landing Pad Footprint – Pin A1 Reference

Plug



Receptacle

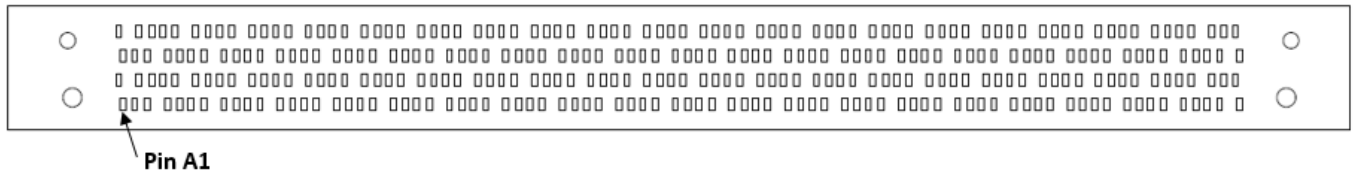

3.4 PCB General Requirements


<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Maximum recommended board warp – 7 mils/inch*. (Sufficient for surface finishes that have less than .001” thickness variation such as OSP, ENIG, Immersion Tin and Silver.) 	<ul style="list-style-type: none"> Minimizes the risk of opens
<ul style="list-style-type: none"> The Pin 1 locating chamfer is shown on layout. Part should be oriented to align to the chamfer. 	<ul style="list-style-type: none"> Ensures correct board alignment

***Note: The recommended board warp is also based on the assembly process stencil thickness used.**

3.5 Preferred Mating/Un-Mating and Allowable Mate Angles


<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Layout should include a slightly larger silkscreen outline of the component housing. 	<ul style="list-style-type: none"> Silkscreen is visible after connector placement, and allows for "first-piece" visual inspection of polarity/orientation.
<ul style="list-style-type: none"> When mating/un-mating card where you rotate on connector width – max angle is 2 	<ul style="list-style-type: none"> Prevents connector damage
<ul style="list-style-type: none"> When mating/un-mating card where you rotate on connector length – max angle is 2 	<ul style="list-style-type: none"> Prevents connector damage

Mating and Un-mating:

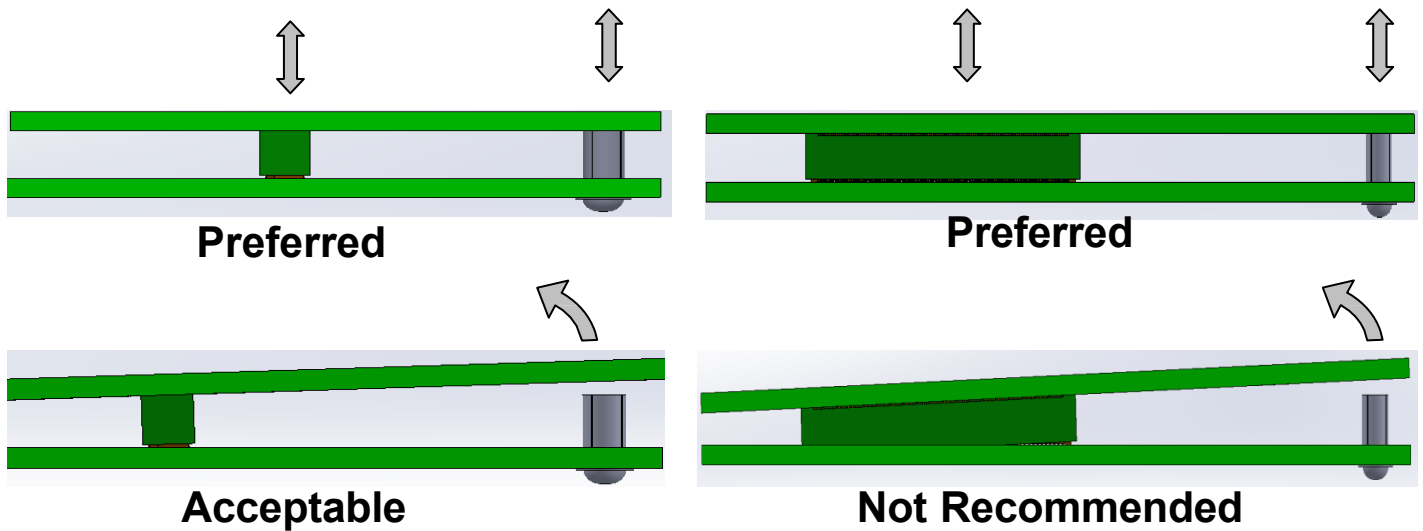


Mating and Un-mating:

1. Rotating on connector width

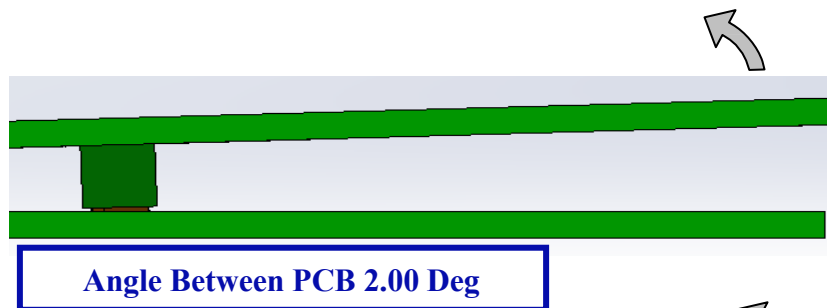

2. Rotating on connector length

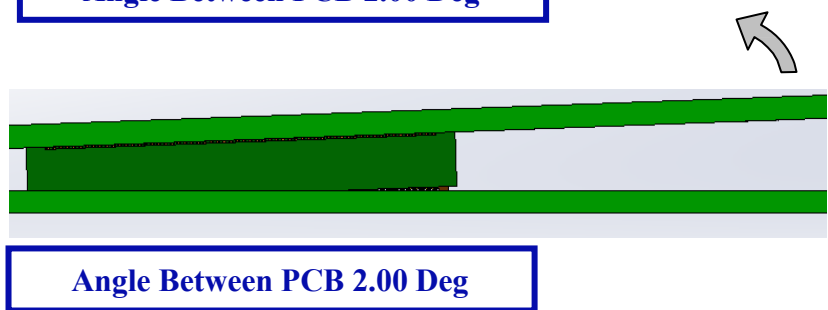

3.6 Lynx QD Mating and Polarizing Features

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> PCB can be designed using the guidepost for further polarizing 	<ul style="list-style-type: none"> Prevents incorrect mating and damage to the connector
<ul style="list-style-type: none"> Maximum mis-alignment in X direction is +/-0.1mm. Maximum mis-alignment in the Y direction is +/-0.05mm. 	<ul style="list-style-type: none"> Prevents damage to the connector
<ul style="list-style-type: none"> Blind mates should include standoffs or mechanical alignment hardware to assist.(See section 3.8 for details) 	<ul style="list-style-type: none"> Completes gross alignment allowing connector housing to begin next level of align and prevents stubbing of

Polarizing Features



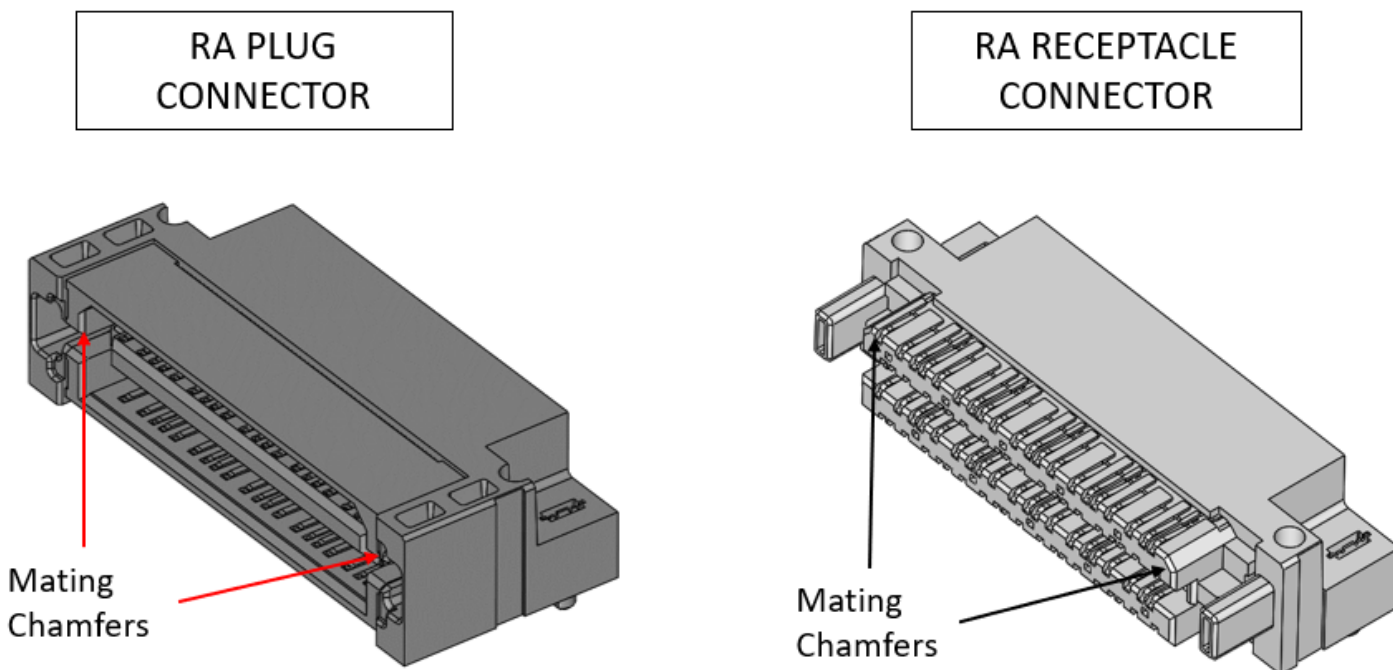


Figure 3.7.1 – The QD coplanar is shown. The Right Angle and Vertical Stacker connectors have similar polarizing features

VERTICAL PLUG
CONNECTOR

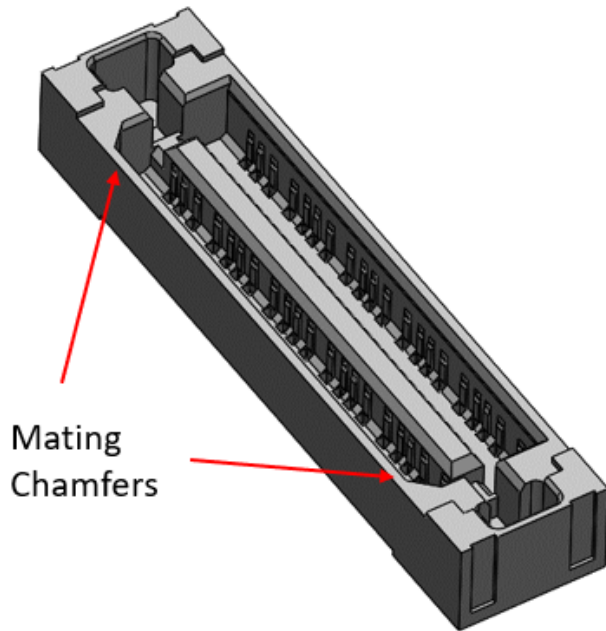

VERTICAL RECEPTACLE
CONNECTOR

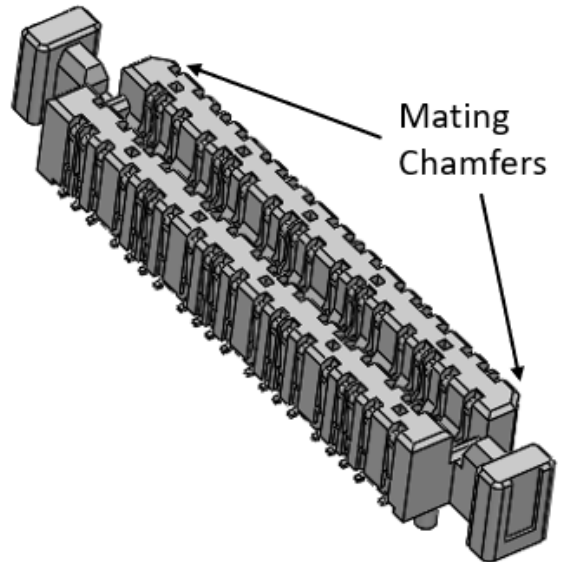

3.7 Mechanical Requirements


The Lynx QD connector should NOT be used as the primary mechanical structure when used within interposer board connecting two boards within a system. Board assembly weight and shock and vibration forces should be supported by other mechanical means such as standoffs. The following describes minimum requirements for mechanical packaging.

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Provide sufficient hold down forces to retain mated cards. 	<ul style="list-style-type: none"> Insure connectors stay mated during shipment and vibration.
<ul style="list-style-type: none"> Alignment Pins are required for multi-connector application. Should be placed outside the connector keep-out zones. 	<ul style="list-style-type: none"> Provides guidance for blind mating.
<ul style="list-style-type: none"> Standoffs are required for all applications. 	<ul style="list-style-type: none"> Maintain minimum wipe regardless of shock, vibration and board warp tolerances. Support the mated boards and protect the BGA solder joints.
<ul style="list-style-type: none"> Nominal stand-off lengths should be 0.15mm greater than connector stack height. Insure a <u>minimum</u> height of "stack height" + 0.05mm – see below 	<ul style="list-style-type: none"> Matrix provides the correct stand-off length to minimize board or connector stresses.
<ul style="list-style-type: none"> Stand-offs should be placed outside the connector keep-out zones. 	<ul style="list-style-type: none"> Allows for connector rework without having to remove stand-offs
<ul style="list-style-type: none"> Number of stand-offs and pattern of placement should prevent all mechanical stresses to the solder joint. 	<ul style="list-style-type: none"> Insures no solder joint failures due to shock and vibration.

Example:

Nominal Connector Stack Height = 4mm (Right)


Nominal standoff length = Stack-height + 0.15mm = **4.15mm**

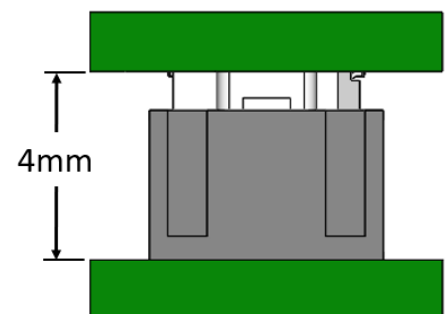


Accounting for stand-off tolerances –

Minimum recommended standoff length = Stack-height + 0.05mm = 4.05mm

Co-planar – Mated Dimensions (mm)

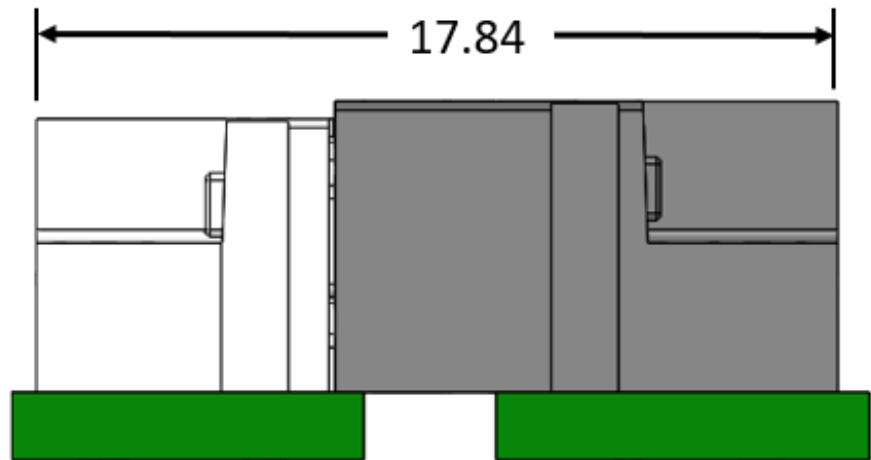


Right Angle – Mated Dimensions (mm)

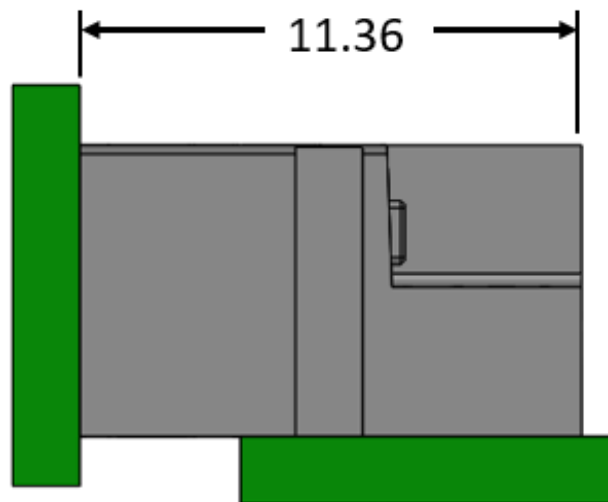

3.8 Keep-out Zone and Clearances

The Lynx QD connector keep-out zone is required for re-work capability. This allows clearance around the connector housing for rework tooling and nozzles.

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> The recommended minimum clearance required is 3mm – preferred clearance is 4mm to non-fragile adjacent components. 	<ul style="list-style-type: none"> Rework nozzle - physical clearance
<ul style="list-style-type: none"> It's preferred to have 5mm clearance to adjacent devices that are very fine pitch with small thermal mass, and could re-reflow – this is dependent on board thickness, copper weight and connector height 	<ul style="list-style-type: none"> Prevents re-reflow of adjacent device, which could cause shorts/defects on that device.

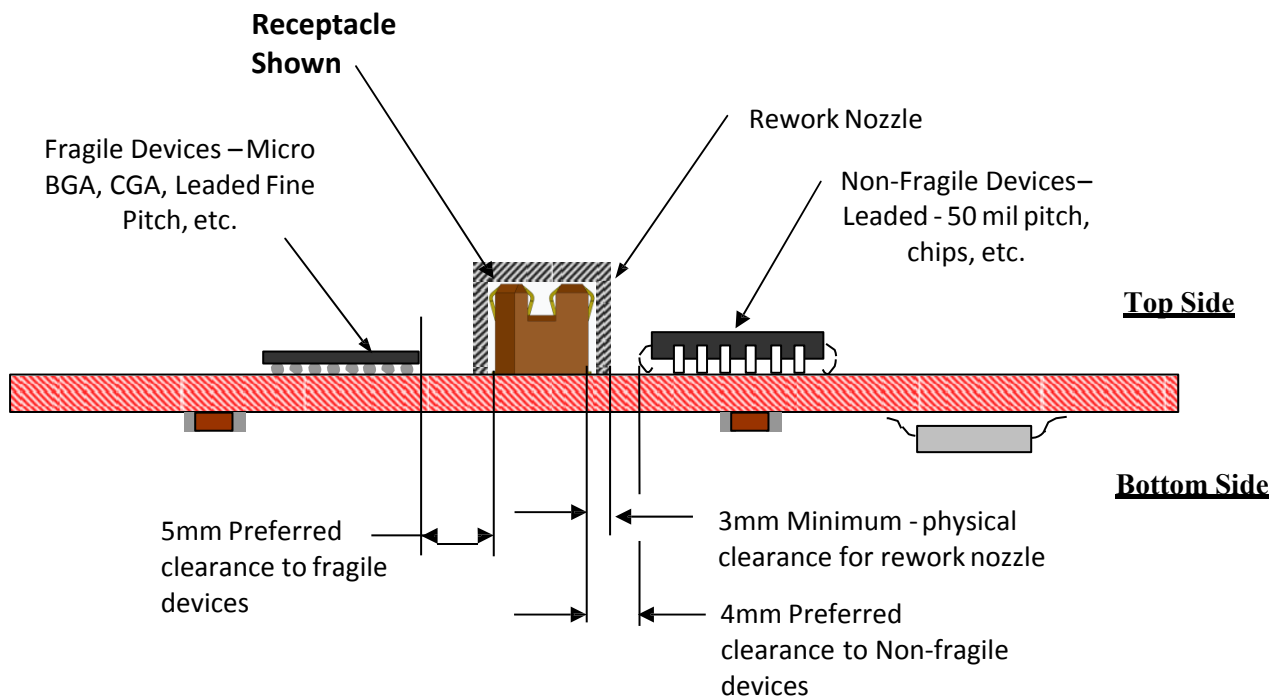

4.0 Connector Handling

The Lynx QD connector leads are robust and not easily susceptible to damage. Standard SMT device care should be taken when handling the connectors through the process.

Outer box and foam packaging can be removed in the stockroom prior to transferring the parts to the SMT area.

Lynx QD connector materials are NOT moisture sensitive per J-STD-020. This standard does not apply to connectors.

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Connectors should be kept in the Tape & Reel for transfer and storage in the SMT process. 	<ul style="list-style-type: none"> Protects the connector lead frame until it can be loaded into the placement machine
<ul style="list-style-type: none"> Storage conditions should be $\leq 30^{\circ}\text{C}$ and 60% Relative Humidity. 	<ul style="list-style-type: none"> Insure connector meets standard shelf life durations without impact to solderability. Reel and parts should be packed in vapor barrier bags with desiccant if storage environment exceeds the requirements defined.

5.0 Solder Paste Process

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Liquid Photo-Imageable (LPI) solder mask over bare copper is preferred. 	<ul style="list-style-type: none"> Most common – provides best adhesion for solder mask - preventing peeling and flaking of mask during assembly processes.
<ul style="list-style-type: none"> Recommended stencil thickness 5-6mils (0.127 - 0.152mm) 	<ul style="list-style-type: none"> Minimizes the risk of opens
<ul style="list-style-type: none"> Recommended aperture is reduced by 2 mils (0.05mm) 	<ul style="list-style-type: none"> Minimizes the risk of solder bridging

Board Warp Matrix - The following matrix defines the board warp spec required for each of the listed variables – Stencil Thickness and Pad Finish Co-planarity


		Pad Finish Co-planarity	
		<.001"	<.002"
Stencil Thickness and Paste Process Variation	5 mil +2/-0 mil	.007"	.005"
	5 mil +2/-.5 mil	.005"	Not Recommended
	6 mil +2/-0 mils	.007"	.007"
	6 mil +2/-.5 mil	.007"	.005"

6.1 Placement Process

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Connector should be pre-oriented for machine vision system alignment. 	<ul style="list-style-type: none"> Prevents nozzle slip/skew, between camera and placement, due to connector weight.
<ul style="list-style-type: none"> Nozzle selection should be based on connector weight <p>Note: Refer to Placement equipment specs to verify capability</p>	<ul style="list-style-type: none"> Heavier connectors require larger bore nozzles to allow for sufficient vacuum and pick-up force and prevent part slip or skew.
<ul style="list-style-type: none"> Placement location/centroid of the part should be based on the contact tails. 	<ul style="list-style-type: none"> Minimizes the percentage of contact tail that is off-pad.


6.2 Placement Process – Feeders

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Connectors are shipped in Tape & Reel and are equipped with a cap (or surface) that provides a flat vacuum pickup area – see below. 	<ul style="list-style-type: none"> Meets the requirements of industry standard placement equipment
<ul style="list-style-type: none"> The Pickup TAB can be removed by hand after reflow 	<ul style="list-style-type: none"> See reflow process section for more info

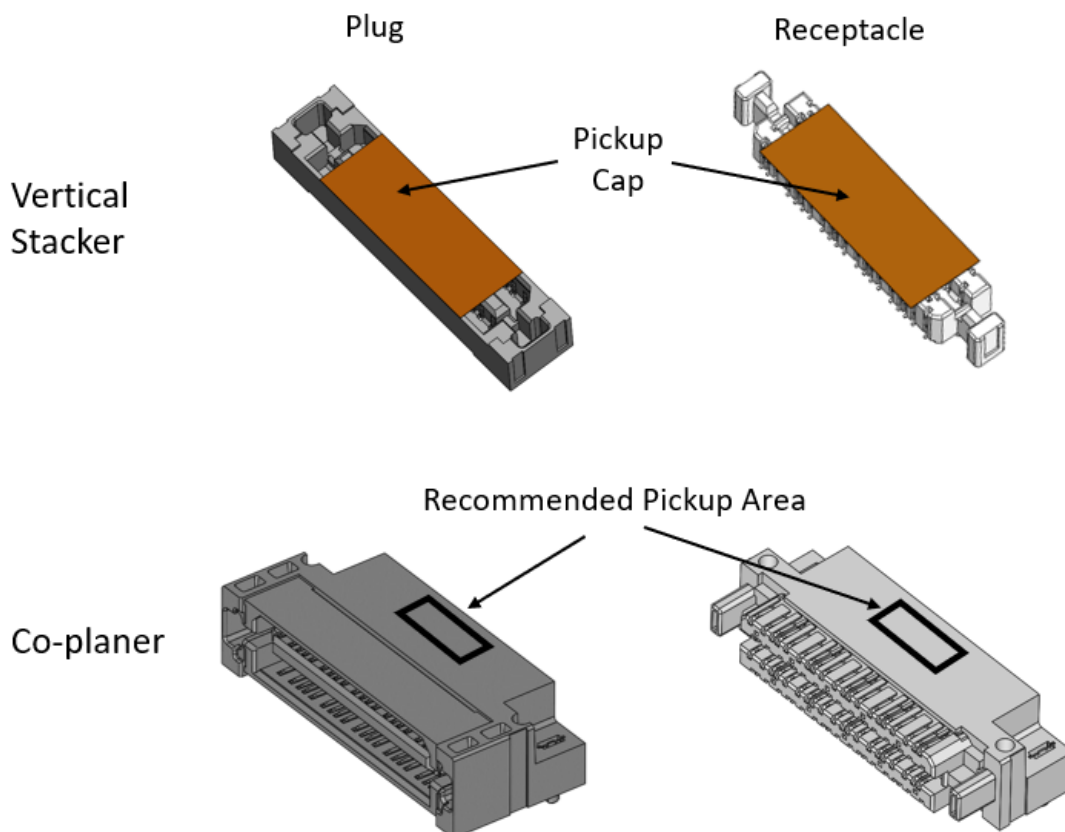


6.3 Reflow Process – Reflow Profile Recommendations

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Set process to the solder paste supplier’s recommended profile. 	<ul style="list-style-type: none"> This varies by supplier and specific flux chemistry
<ul style="list-style-type: none"> Recommend only maximum of 2 Reflow Cycles 	<ul style="list-style-type: none"> Minimizes the solder wicking
<ul style="list-style-type: none"> Recommend using a Soak Profile over a straight ramp to peak. The soak time and temperature is defined by the paste manufacturer based on optimal flux chemistry activation temperatures. 	<ul style="list-style-type: none"> Minimizes void formation and risk of pillow head defects Minimizes delta T’s across thermally heavier parts

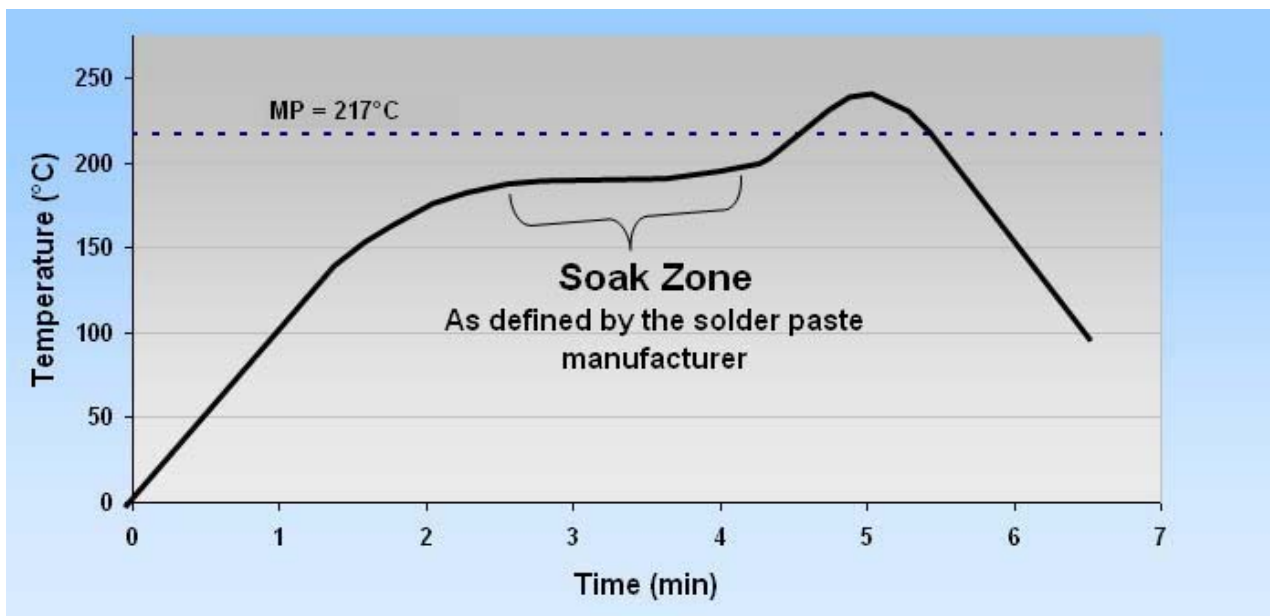

6.4 Reflow Process – Vacuum Cap Removal

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Post reflow Pickup TAB removal 	<ul style="list-style-type: none"> Pickup cap can be removed after reflow/inspection.

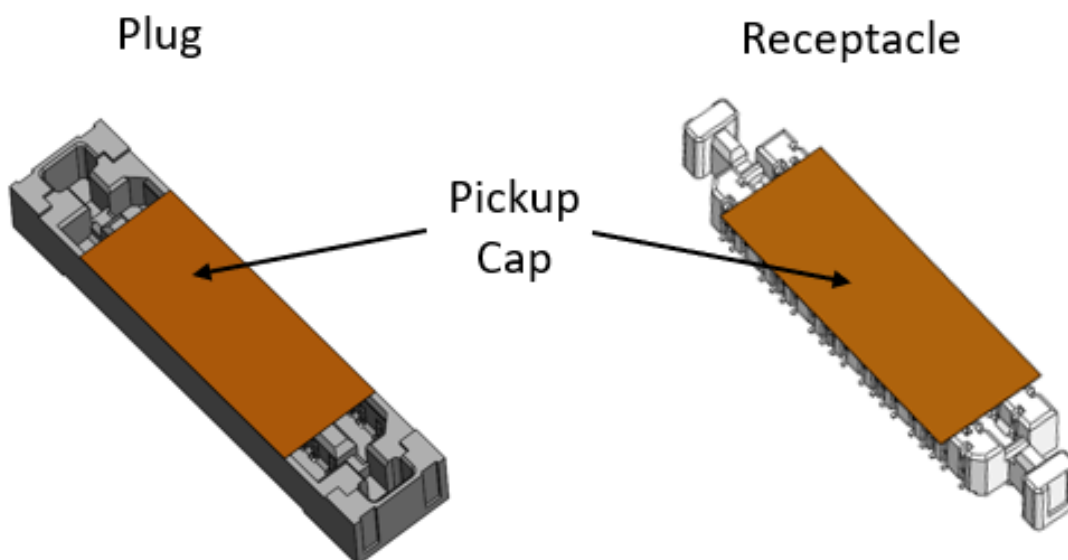

7.0 Double Sided Reflow Process

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Lynx QD is compatible with double-sided reflow soldering. ATCS recommends a secondary method of retention (such as peel-able solder mask) when running Lynx QD connectors upside down in the reflow process. 	<ul style="list-style-type: none"> Prevents connectors falling off the board.
<ul style="list-style-type: none"> Before applying the secondary retention and running connectors upside down in reflow- inspect the connector to insure the contacts have reflowed and the housing is seated to the board surface – see Reflow Process section for more info. 	<ul style="list-style-type: none"> Improperly reflowed connectors and possible cold and/or insufficient solder joints will result in problems with the secondary method of attachment
<ul style="list-style-type: none"> Remove the Pickup TAB after the 1st reflow cycle. 	<ul style="list-style-type: none"> Reduces the weight of the connector and the risk of the connector dropping off the board.
<ul style="list-style-type: none"> One method is to apply RTV or peel-able solder mask to the base of the housing AFTER the 1st reflow cycle 	<ul style="list-style-type: none"> Holds connector on the board Should be tested and verified in the customer's specific process
<ul style="list-style-type: none"> The method of retention and material used is the decision of the customer. ATCS can provide input and technical support during the development phases. 	<ul style="list-style-type: none"> Each customer will have different process and design restrictions or requirements for their specific application.

8.0 Rework Process

<u>Requirements</u>	<u>DFM Impact/Benefit</u>
<ul style="list-style-type: none"> Use specialized rework equipment for connector removal and replacement, and should include thermal profiling and temperature measurement capability. 	<ul style="list-style-type: none"> Achieves reflow at point of removal without excessive heat to the connector and PCB, or insufficient heat causing lifted pads.
<ul style="list-style-type: none"> Follow reflow profiling guidelines in section 8 and make sure to include a thermocouple on <u>top of the connector housing</u> during reflow profiling – It is preferred to keep the plastic below 260°C with a max allowable temperature of 280°C. 	<ul style="list-style-type: none"> Insures against plastic over-heating and damage. (See reflow section for more detail.)
<ul style="list-style-type: none"> Automated placement capability is preferred – including vacuum pick-up and placement. 	<ul style="list-style-type: none"> This will provide consistent placements.
<ul style="list-style-type: none"> Hand/Manual placement is not recommended. 	<ul style="list-style-type: none"> Manual placement is inconsistent
<ul style="list-style-type: none"> Follow normal rework processes for PCB site cleaning and prep, and reflow profile development. 	<ul style="list-style-type: none"> Improves rework yield and insures reliable solder joints
<ul style="list-style-type: none"> “Flux-only” processing is not recommended. 	<ul style="list-style-type: none"> Inconsistent amount of metal left on pad during site prep, resulting in excessive pad co-planarity variation – increased risk of solder opens.
<ul style="list-style-type: none"> Paste deposition is recommended using either an automated dispensing system or manual microstencils – resulting in a 6 mil tall deposit. 	<ul style="list-style-type: none"> Prevents opens/shorts with high reliability solder joints.

Addendum A

Lynx QD Connector Weights

Type	Part Number	Description	Design Height (mm)	# of Contacts	Weight w/Cap (grams)	Weight per Contact (grams/contacts)
Plug						
Receptacle						

Note: Cap refers to vacuum pick-up cap1

Addendum B: DFM and Assembly Readiness Check Sheet

Item	Sect	Check	Change/Comments	Who	Status
PCB Design	3.1 to 3.4	<ul style="list-style-type: none"> • Copper defined .60mm (024") pad – clear of soldermask • Minimum .22mm (.005") Solder Mask dam to Via, or via masking • Specify board warp spec per processvariables • Multi connector orientation is thesame • Long side of connector is parallel across the larger spans • Layout includes slightly oversized silkscreen outline of connector. 			
Mech. Req'ments	3.5-3.7	<ul style="list-style-type: none"> • Stand-offs or mechanical spacers are required to secure the mated distance. 			
Handling	4.0	<ul style="list-style-type: none"> • Removal/replacement from tape & reel or tube is not recommended – minimize manual handling • Handling process should include re-packaging and handling pre-cautions. 			
Solder Paste	5.0	<ul style="list-style-type: none"> • Stencil thickness is 5-6mil. • Stencil aperture should be reduced by 2mils. 			
Placement	6.0-6.1	<ul style="list-style-type: none"> • Set-up should full lighting, and pre-orient align. • Custom programming and nozzles may be required. 			
Reflow	6.2-6.3	<ul style="list-style-type: none"> • Follow solder paste manufacturer's recommended profile. • Recommend using a soak profile in reflow. 			
		<ul style="list-style-type: none"> • Follow recommended process for vacuum capremoval. 			
Double Sided Reflow	7.0	<ul style="list-style-type: none"> • Connectors that exceed the weight limits may require post-reflow retention such as RTV or peel-able solder mask. 			
Rework	8.0	<ul style="list-style-type: none"> • Automated placement capability preferred • Manual placement not recommended • Paste deposition should be 5-6 mils high • "Flux-only" processing not recommended 			