

# WireLock® Solution Overview

## Wire to Board

**Crimping Contact:**  
10153126 (22AWG~26AWG), USCAR-2  
10163003 (22AWG~26AWG), LV214 S2



**Right Angle Header:**  
THT: 10153118 (10~40p)

**Cable Housing with CPA:**  
10159549 (10~ 40p)

**Vertical THT Header :**  
10158465 (10~ 40p)

**Vertical SMT Header:**  
10158001 (10~40p)


**RASMT Header:**  
10174399 (18/20p)  
10169084 (28p)

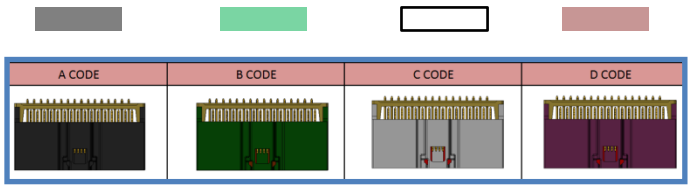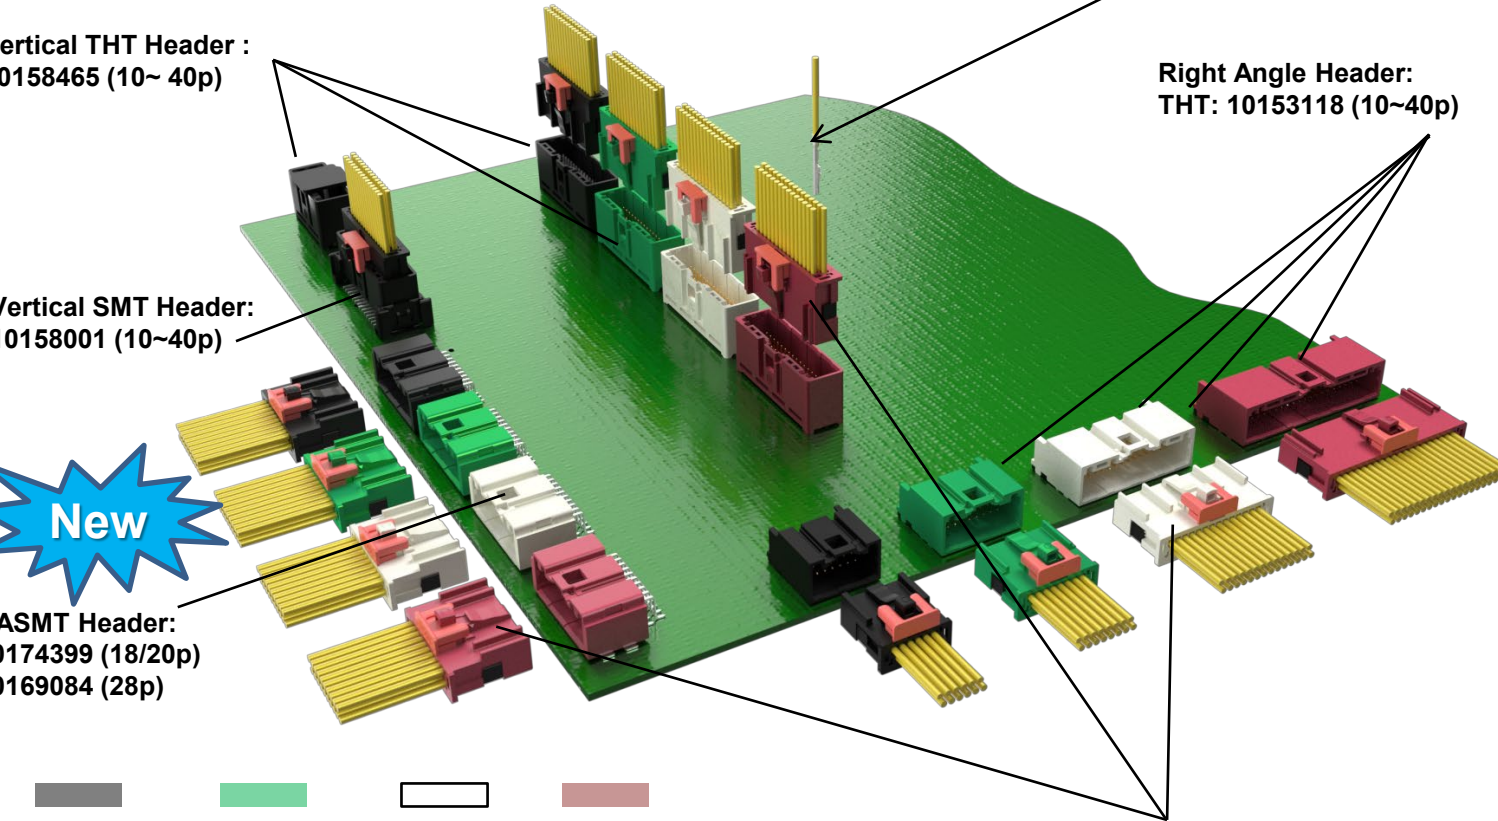

## Wire to Wire

**Female Cable Housing:**  
10153123 (10~ 40p)  
**Female Crimping Contact:**  
10163003 (22AWG~26AWG)

**Male Cable Housing:**  
10168908 (10~40p)  
**Male Crimping Contact:**  
10168906 (22AWG~26AWG)

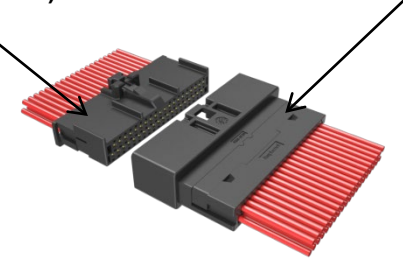

## Flex to Wire

**Right Angle Header:**  
THT: 10168530

