




TERMINAL DATA FOR USE WITH MINI LATCH HOUSING		
WIRE BARREL	CRIMP HEIGHT	INSULATION DIA.
LARGER THAN 18 AWG NOT RECOMMENDED		
18-20	.042-.044/1.07-1.12	.042-.060/1.07-1.52
22-26	.032-.034/.81-.86	.036-.060/.91-1.52
27 AWG WIRE SEE NOTE 1	.028-.030/.71-.76	.028-.054/.71-1.37
28-32	.026-.028/.66-.71	.028-.054/.71-1.37
34-36	.022-.024/.56-.61	.020-.040/.51-1.02




SECTION Z-Z
ALL TYPES
TYPE II SHOWN

PREFERRED TYPE II & III
INFORMATION SHOWN APPLIES TO
PRODUCT OFF TYPE II OR TYPE III
ANVIL.

- NOTE:
- DATA SHOWN FOR 27 AWG WIRE IS FOR 7 STRAND WIRE USING 28-32 AWG TERMINALS AND TOOLING
 - RECOMMENDED INSULATION CRIMP HEIGHT IS EQUAL TO INSULATION DIAMETER PLUS 0.010" [0.25]
 - SEE TA-146 FOR CONTACTS NOT USED IN HOUSINGS.
 - SEE TA-531 FOR INSTRUCTIONS ON INSTALLING OR REMOVING TERMINALS FROM HOUSINGS.

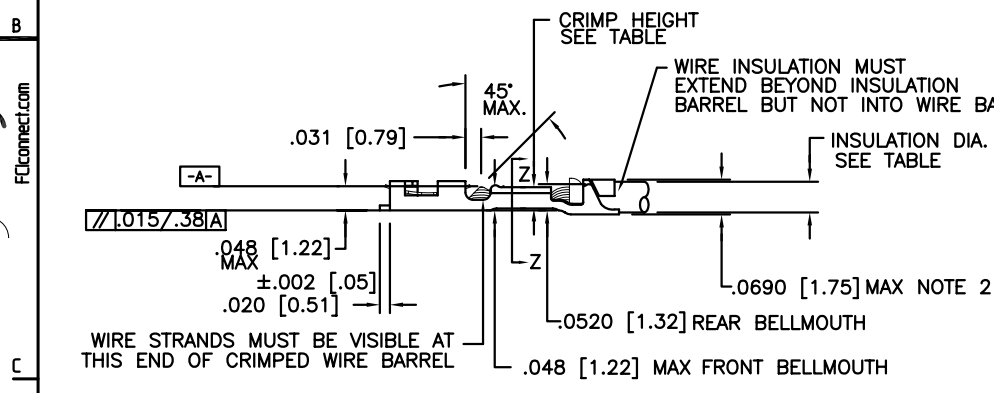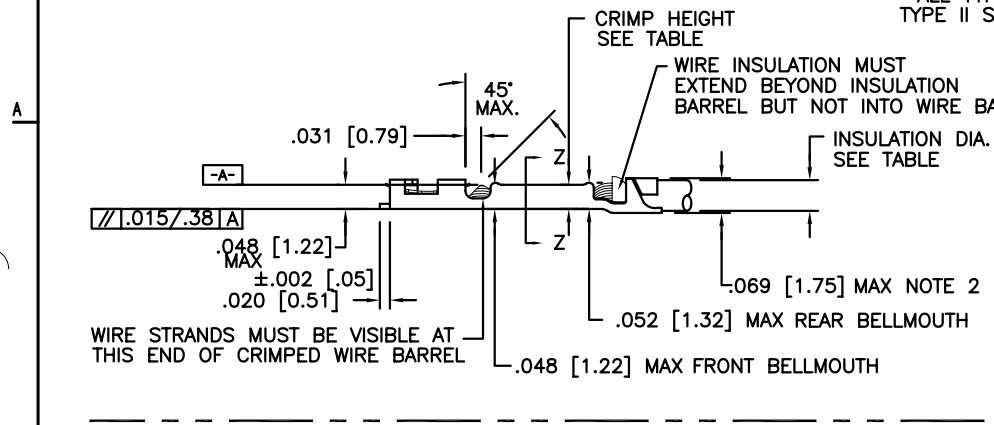

OPTIONAL TYPE I
INFORMATION SHOWN APPLIES TO
PRODUCT OFF RADIUS TYPE ANVIL.

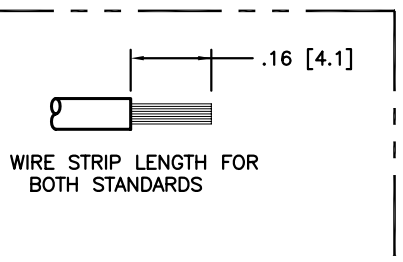

mat'l. code				surface <input checked="" type="checkbox"/> tolerance		projection		product family PV TERMINALS	
ltr	ecn no	dr	date	tolerances unless otherwise specified		INCH/MM		title	
N	V10280	AR	2/7/91	angles	linear	.XX±.01/.X±.3		LATCH HOUSING/MINI PV	
P	V12332	JWB	8/23/91			.000±.005/.000±.13		CRIMP & APPLICATION DATA	
R	V13061	MRC	10/29/91			.000±.0020/.000±.001		scale 3:1	
S	V50684	LSS	7/14/95	dr	T. BREWBAKER	4/17/06		sheet 1 of 1 size	
T	v06-0303	HTB	4/17/06	engr	T. BREWBAKER	4/17/06		dwg no	
				chr	T. BREWBAKER	4/17/06		TA-75	
				appd	T. BREWBAKER	4/17/06		A3	
sheet	revision	T						type Product Customer Drawing	
index	sheet	1							