


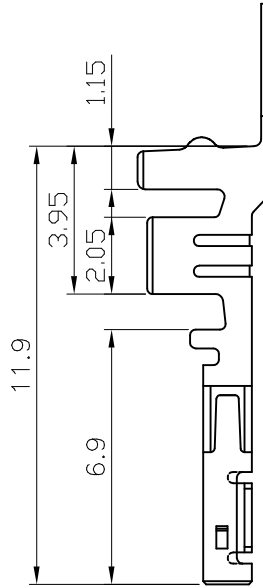


PRODUCT NUMBER


10132447-1X1XLF

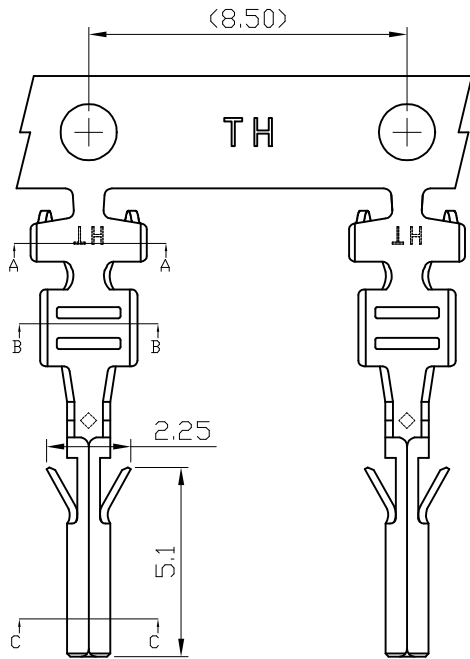

Section A-A



Section B-B



Section C-C

NOTES:

1. MATERIAL:
TERMINAL: HIGH CONDUCTIVITY COPPER ALLOY.
2. PLATING:
CONTACT AREA : OPTIONAL
CRIMP AREA : OPTIONAL
UNDER PLATING : MIN. 15u" NICKEL OVERALL
3. APPLICABLE WIRES: AWG#16~#20, INSULATOR O.D:
2.2mm MAX.
4. REFER GS-20-0399 APPLICATION SPECIFICATION FOR MATING CONNECTOR
5. PRODUCT SPECIFICATION: GS-12-1291.
6. REEL PACKING AS PER GS-14-2419.
7. APPLICATION SPECIFICATION : GS-20-0399
8. THIS LF PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
9. PRODUCT NUMBER SCHEME:

10132447-1 X 1 X LF

- LEAD FREE
- PLATING TYPE:
P: PRE-PLATED
- PLATING CODE:
1: GOLD FLASH OVERALL
2: 60u" MIN MATTE TIN
3: 15u" GOLD PLATING ON CONTACT AREA
4: 30u" GOLD PLATING ON CONTACT AREA

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection mm		product family MINITEK PWR 3.0 HCC			
ltr	ecn no	dr	date	tolerances unless otherwise specified				mm		title			
A		TAI	2015-02-25	angles	linear	.0±0.30		mm		RECEPTACLE CRIMP TERMINAL			
B	ELX-T-22964	TAI	2016-01-08			.00±0.20		mm		HIGH CURRENT WIRE CONNECTOR			
C	ELX-T-26528	TONY	2017-03-31	0°±5'				scale		N.T.S.			
D	ELX-N-30328	TONY	2018-05-30	dr	KENNY TAI	2015-02-16		Amphenol FCI		dwg no			
E	ELX-I-43460	AKHIL	2022-01-21	engr	AKHIL RAJAN	2022-01-21				sheet 1 of 1			
				chr	MITHUN PAUL	2022-01-21				10132447			
				app	SPK	2022-01-21				A3			
sheet index	revision	E										type	Product Customer Drawing
	sheet	1											