


- NOTE:
1. ELECTRICAL CHARACTERISTICS
  - 1-1 RATING CURRENT: 2A AC/DC
  - 1-2 RATING VOLTAGE: 250V AC/DC
  - 1-3 WITHSTANDING VOLTAGE: 800V AC/1MINUTE
  - 1-4 OPERATING TEMPERATURE: -40°C~+105°C
  2. MATERIAL: REFER TO ORDERING CODE
  3. FINISH: BRIGHT TIN PLATING
  4. USED WITH AFCI HOUSING 10156612
  5. PRODUCT SPEC: GS-12-1594
  6. APPLICATION SPEC: GS-20-0631
  7. ORDERING CODE: 10156613-2 X O X L F

MATERIAL \_\_\_\_\_ PACKAGE  
 +-BRASS  
 2: PHOSPHOR BRONZE  
 1: REEL

SEE CONTACT INFORMATION

10156613-X20XL F	AWG#22~24 0.35~0.22mm <sup>2</sup>	$\phi 1.60$ MM MAX	1.60MM	1.70MM	2.00MM
10156613-X10XL F	AWG#24~26 0.22~0.13mm <sup>2</sup>	$\phi 1.30$ MM MAX	1.25MM	1.55MM	1.85MM
PART NO.	WIRE SIZE	INSULATION O.D.	DIM"A"	DIM"B"	DIM"C"

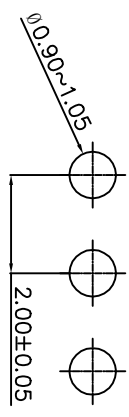

RECOMMENDED PCB LAYOUT  
 THICKNESS: 1.60MM

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 406	ISO 1101	MINITEK	
tr	ecn no	dr	date	tolerances unless otherwise specified	title
A	New release	Jason	2020-2-19	linear	2.0PITCH BOARD-IN, R/A, TERMINAL
B	ELX-N-36510	Jason	2020-4-2	linear	
0+X"		.XXX±.10		mm	scale 2:1
dr	Jason Wang	2020-1-19			
eng	Jason Wang	2020-4-2			
chr	-				
qppd	Tim Yoo	2020-4-2			
sheet	revision	B			
index	sheet	1			
dwg no		sheet 1 of 1		size	
10156613				A3	
type		Product Customer Drawing			